



—MODEL— **RP-4V**

Reduced Pressure Principle Vertical Backflow Preventer



- **Low Head Loss**
- **No Internal or External Weights**
- **Durable Heavy Duty Construction**
- **Positive Automatic Operation**

The Cla-Val Model RP-4V Backflow Preventer protects potable water lines against contamination. This assembly combines protection against backflow with exceptionally low head loss characteristics. It operates on the reduced pressure principle, which is an accepted method of safeguarding potable water supplies against the hazards of cross-connections. The 4" Size Model RP-4V is approved by the Foundation for Cross Connection Control and Hydraulic Research at the University of Southern California. All sizes comply with the AWWA Standard C511-89.


The Model RP-4V is carefully constructed of corrosion resisting materials. It consists of two independently acting toggle lever check valves, an automatic pressure differential relief valve located between the two check valves, two shutoff valves and four test cocks. The levers, links and pins are rugged, simple and direct with ample clearances to insure long, trouble free operation, even in very hard water and over prolonged periods of time. All internal parts are readily accessible without removing the device from the line. Field testing is easily performed by means of the test cocks.

Typical Applications

The unique RP-4V is installed in vertically oriented piping systems to protect potable water against backflow contamination

Installation

It is recommended that this unit be installed with check valves in a horizontal position and that provisions for adequate drainage be made. Right hand mount of relief valve is standard. Left hand mount is optional. Standard Shut-off Valves are a resilient seat non-rising stem design. When used in fire service, OS&Y Shut-off Valves are required.

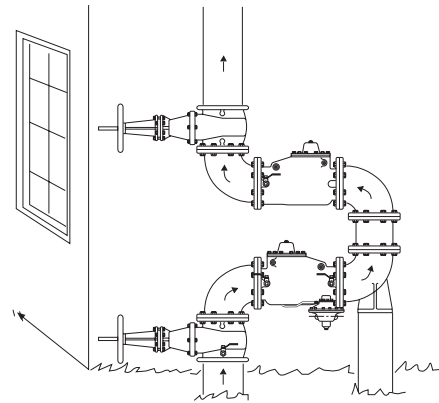

Specifications

Sizes:

4", 6", 8"

End Detail:

125 ANSI B16.1

Maximum Working Pressure:

175 psi

Hydrostatic Test Pressure:

350 psi

*Exterior may be epoxy coated at extra cost

Max. Temperature:

to 110° F

Fluid:

Water

Material:

Main Valve Body and Cover:
Cast Iron ASTM A-126 interior
epoxy coated*

Main Valve Trim:

Bronze ASTM B-61

Differential Relief Valve:

Bronze ASTM B-61 with Stainless
Steel 316 Trim

Shut-off Valves:




Resilient Seat Outside Stem and Yoke
Type, Epoxy Coated Interior and Exterior
AWWA C550

4" size is approved by the Foundation for Cross-Connection Control and Hydraulic Research at the University of California.



RP-4V

Reduced Pressure Principle Backflow Preventer Flow Curves

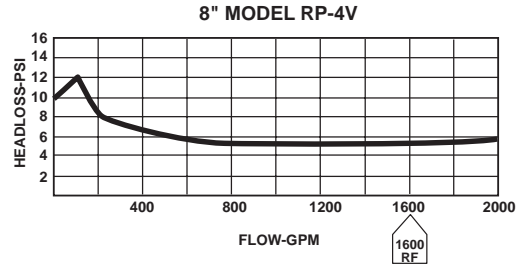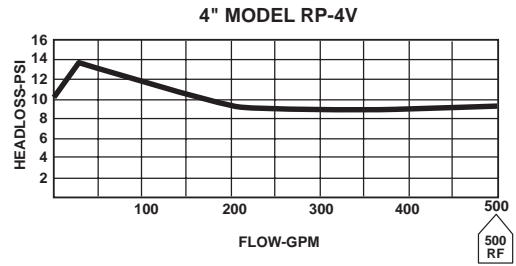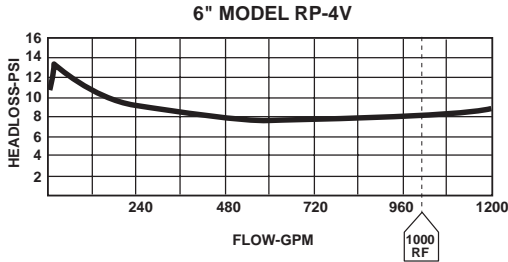


"Rated Flow" Values adopted by the American Water Works Association and the New England Water Works Association.
 4" Model RP-4V Flow curve generated by the Foundation for Cross-Connection Control and Hydraulic Research at the University of California.

Dimensions (In Inches)

Valve Size	A	B	C	D	E	F	G	H	I	J	K
4"	15.56	23.13	54.25	28.13	22.75	18.16	5.50	16.50	32.63	5.25	9.13
6"	18.56	26.13	63.25	36.13	30.13	23.63	7.00	17.50	41.63	5.25	9.13
8"	20.56	28.13	69.25	43.50	37.75	28.69	8.75	18.75	50.25	5.25	9.13

We recommend providing adequate space around assembly for maintenance work and testing.

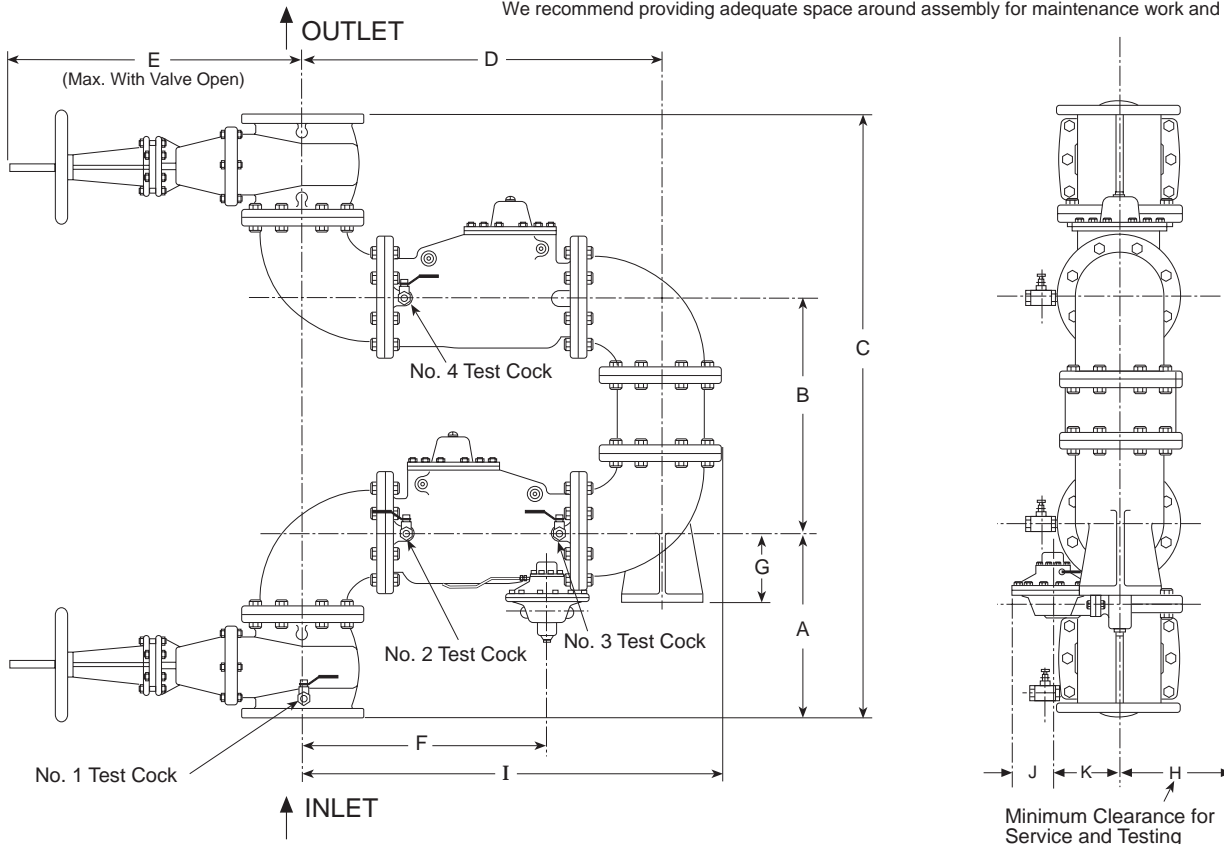

CLA-VAL

PO Box 1325 Newport Beach CA 92659-0325
 Phone: 949-722-4800 • Fax: 949-548-5441

CLA-VAL CANADA, LTD.

4687 Christie Drive
 Beamsville, Ontario
 Canada LOR 1B4
 Phone: 905-563-4963
 Fax: 905-563-4040

CLA-VAL SA

Chemin des Mesanges 1
 CH-1032 Romanel/
 Lausanne, Switzerland
 Phone: 41-21-643-15-55
 Fax: 41-21-643-15-50

©COPYRIGHT CLA-VAL 1998 Printed in USA
 Specifications subject to change without notice.

www.cla-val.com

Represented By: